INSTALLATION GUIDE

Atlas Pole Towel Warmer



GENERAL

This installation manual contains instructions for the correct installation of the Atlas Pole Towel Warmer. The warranty will be invalidated if the product is not installed according to these instructions.

KEY FEATURES


- Single vertical pole style warmer with rounded horizontal bars
- Ø32mm x 900mm (H) x 80mm (D) (740mm c-c)
- Energy efficient low-voltage operation (DC12V 60W driver included)

PRECAUTIONS

Installation must be carried out by qualified installers in accordance to this installation guide. AS/NZ standards, rules and safety regulations apply.

- Consult the installing electrician to set up wiring in accordance with the relevant regulations, AS/NZ standards and in accordance with this installation guide.
- This heated towel pole has been designed to air and dry towels. It is not a radiator or space heater.
- Felton heated towel poles comply with the Australia New Zealand Standards (AS/NZ60335).

WHATS IN THE PACK

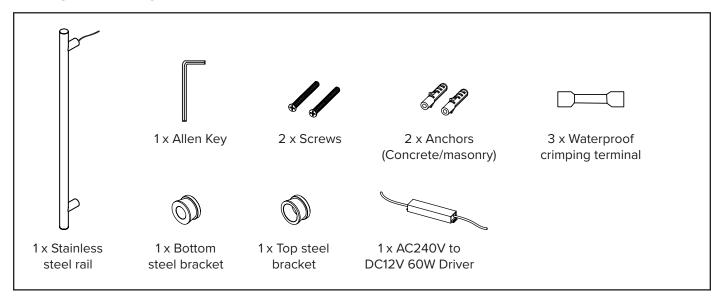


SYSTEM REQUIREMENTS

- The DC12V driver should be located in a concealed position within 2 metres of the heated towel rail. If a 2 metre distance between the DC12V driver and heated towel rail is exceeded, the power supply will not work as designed.
- Pre-wiring should be set up to suit the wattage of the heated towel rail and the DC12V driver supplied.
- The isolating switch can be anywhere for the user's convenience, as long as it is within the requirements of the AS/NZ standards.
- There is no external wiring from the Atlas Pole Towel Warmer.


HOW TO INSTALL

PRE WALL LINING

- Pre-wiring should be set up to suit the wattage of the heated towel rail and the DC12V driver supplied.
- Ensure that there is adequate fixing for the wall mounted brackets.
- A double stud setup is recommended, see Figure A.
- Choose a position for the DC12V driver and install before the GIB, so it is concealed behind the wall
- Leave the cable exiting the wall at the correct point required for fitting the top wall mounted bracket.



POST WALL LINING

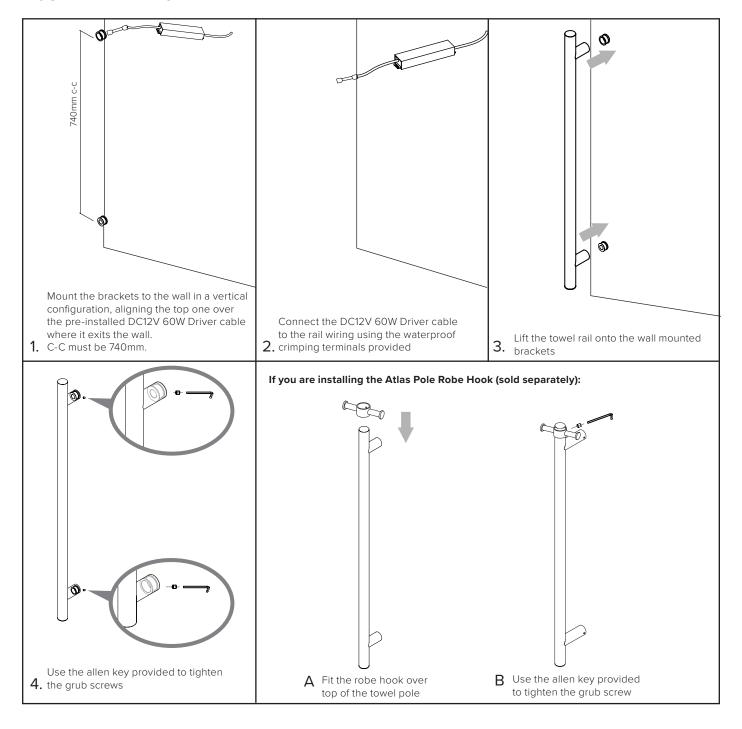



HEATING

Once installed, the towel pole will take approximately 15 minutes to warm up

GENERAL CLEANING

To care for the towel rail day to day, simply wipe with a soft damp cloth and buff dry with a soft, dry cloth

Warranty, Maintenance and Care YOUR COPY TO KEEP

Felton guarantees its heated towel rails to be free from defects in materials and workmanship for a period of five (5) years from the date of purchase. Driver is not included in warranty due to potential power supply fluctuations. Proof of date of purchase, (i.e. receipt) may be required. Felton undertakes at its sole discretion to repair or replace any faulty product within the warranty period. This warranty does not cover any damage to product due to abuse, negligence, improper voltage or improper installation. This warranty is given on the understanding that the heated towel rail is installed by a qualified person in accordance with the installation guide provided and in accordance with the relevant electrical regulations and AS/NZ standard.



At no stage should plated surfaces be cleaned with cleaning agents that contain a corrosive acid or a scouring additive. Plated surfaces should be cleaned with liquid detergent or soap and water. Any damage caused through the use of an unsuitable cleaner will not be covered by warranty.

This warranty is subject to any other rights or remedies that you may have under the Consumer Guarantees Act 1993 (or any other applicable legislation) and to Felton's Terms of Trade.

Please fill in the details below, attach your receipt to this installation guide and keep as your proof of purchase.
Purchased at:
Date of purchase:
nstalled by: