



# INSTALLATION GUIDE

## MOR AERLUX® SHOWER ROSE

FELTON

### SYSTEM REQUIREMENTS

To ensure the optimum performance and customer satisfaction please adhere to the following:

- Flush out all pipe work prior to installation.
- Installation should comply with relevant local authority requirements.

Operating Pressures	MINIMUM		MAXIMUM
	Hot	Cold	
	70kPa (10.2psi)*	70kPa (10.2psi)*	500kPa (72.1psi)
Operating Hot Water Temperatures	55° C		60° C
Operating Cold Water Temperatures	5° C		N/A

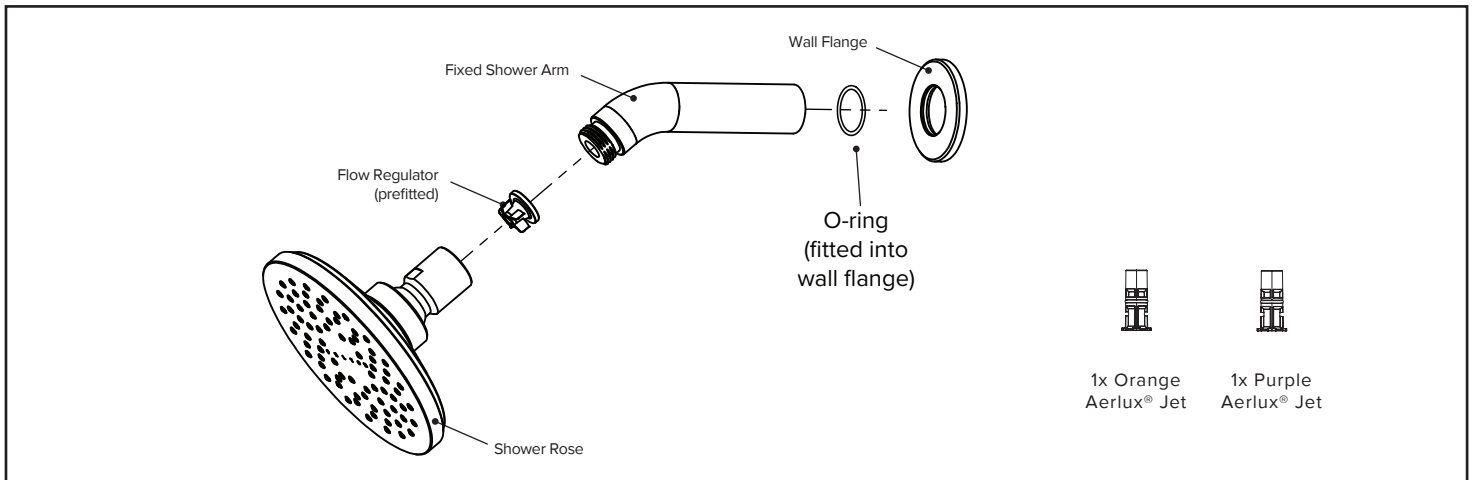
\*Without an Aerlux® jet or flow regulator fitted



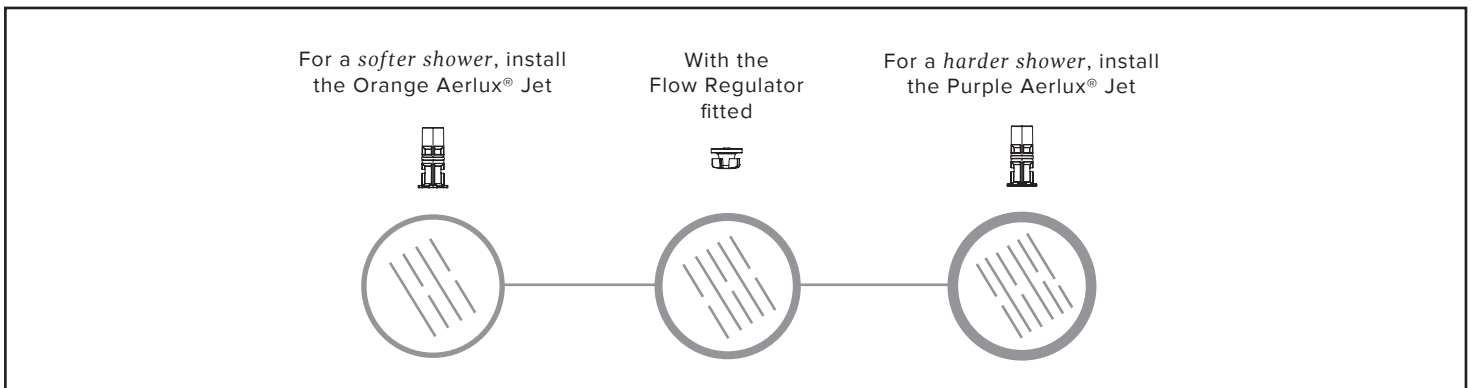
**Failure to comply with the above will void warranties**

⚠ AS/NZS 3500.1 states that pressures above 500kPa can cause damage from water hammer, reduce the life of appliances, taps & fittings, cause excessive noise in the system and recommend that a pressure limiting valve (PLV) be fitted.

### WHAT IS IN THE PACK

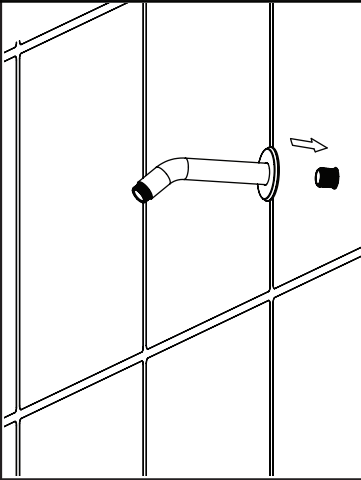
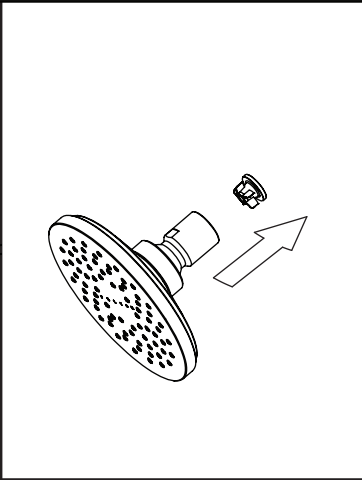
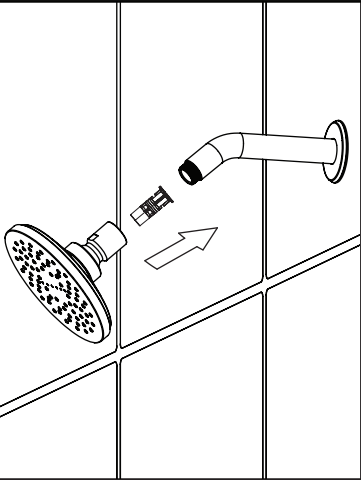
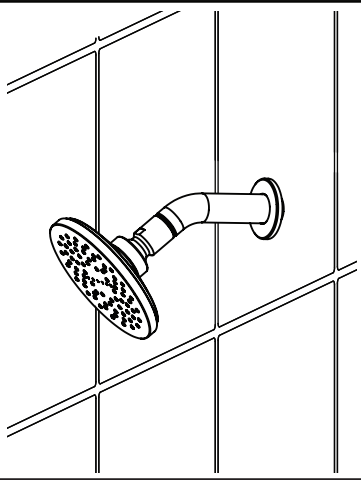


### CHOOSING THE AERLUX® JETS FOR MAINS PRESSURE...

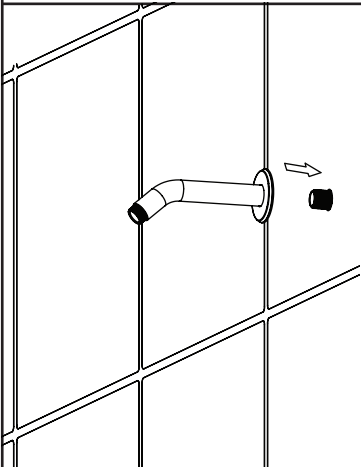
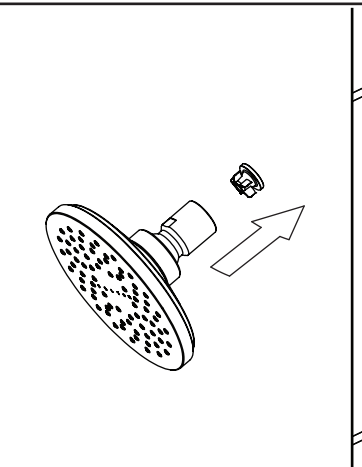
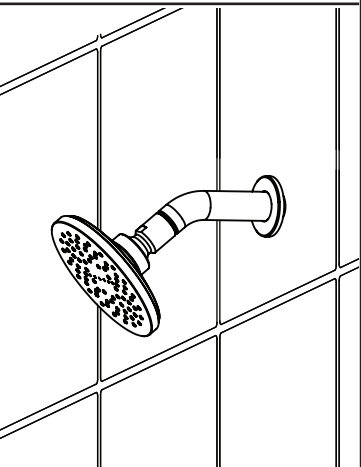


IF YOU HAVE...

**EQUAL HIGH/MAINS PRESSURE**

			
<p>1. Screw the fixed shower arm with wall flange fitted onto a 1/2" barrel nipple (not supplied) at the outlet.</p>	<p>2. Option to remove the prefitted flow regulator from the shower rose if choosing an Aerlux® jet.</p>	<p>3. Select either the Purple or Orange Aerlux® jet and fit into the shower rose.</p>	<p>4. Screw shower rose onto shower arm. Check that there is no leak at this connection.</p>

**EQUAL LOW PRESSURE OR UNEQUAL PRESSURE**

		
<p>1. Screw the fixed shower arm with wall flange fitted onto a 1/2" barrel nipple (not supplied) at the outlet.</p>	<p>2. Remove prefitted flow regulator from the shower rose.</p>	<p>3. Screw shower rose onto shower arm. Check that there is no leak at this connection.</p>

**Warranty, Maintenance and Care YOUR COPY TO KEEP**

Felton Industries Limited guarantees this product to be free from defects in materials and workmanship for a period of five (5) years from the date of purchase. This warranty is effective for 5 years from the date of purchase and covers supply of replacement parts only and 5 years of plumbers labour relating solely to repairing or replacing the product from the date of purchase, provided the product is installed by a registered plumber. You must retain proof of purchase of the product (such as an invoice or receipt) and proof of installation by a registered plumber and provide these to Felton on request. This warranty is for manufacturing defects only and does not cover any damage to product due to abuse, negligence or improper installation. This warranty is given on the understanding that the product is installed by a registered plumber and operated according to Felton's installation guide and the Australian/New Zealand standard AS/NZS3500. This warranty is provided to persons who are a "consumer" under the Consumer Guarantees Act 1993 only and for use in domestic/residential dwellings only (not for commercial use).



At no stage should plated surfaces be cleaned with cleaning agents that contain a corrosive acid or a scouring additive. Plated surfaces should be cleaned with liquid detergent or soap and water. Any damage caused through the use of an unsuitable cleaner will not be covered by warranty. This warranty is subject to any other rights or remedies that you may have under the Consumer Guarantees Act 1993 (or any other applicable legislation) and to Felton's Terms of Trade.

Please fill in the details below, attach your receipt to this installation guide and keep as your proof of purchase.

Purchased at: .....

Date of purchase: .....

Installed by: .....

**For technical assistance please ring: 0800 743 358 or (09) 528 0810**