
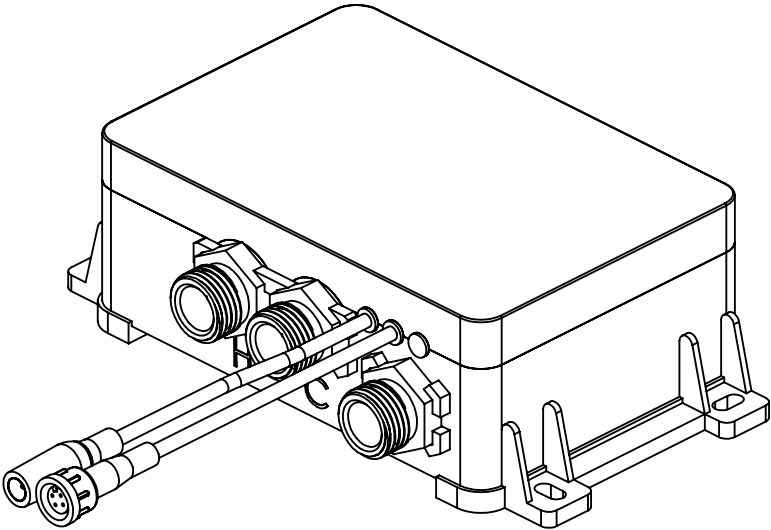


INSTALLATION GUIDE

LINEA

Digital Thermostatic Shower Mixer

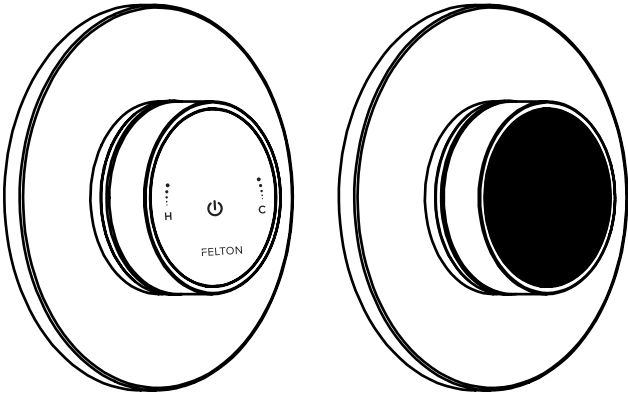

FELTON

CONTENTS

Notice	4
Tools Required	5
Measurements	6
Scope of Application	7
System Connection Diagram	8
Digital Mixing Unit Mounting	8
Control Unit Installation	9
Operating the Control Unit	11
Troubleshooting	12
Warranty, Maintenance and Care	14

NOTICE

PLEASE READ THE MANUAL CAREFULLY BEFORE STARTING THE INSTALLATION. AFTER COMMISSIONING AND TESTING THE SYSTEMS FUNCTIONALITY, THIS DOCUMENT MUST BE GIVEN TO THE END USER OF THE SYSTEM.

PRODUCT TO BE DISCONNECTED BEFORE LINE TEST

In case of a power cut, the unit will remain inactive until the power is back on.

GENERAL

This installation manual contains instructions for the correct installation of the **Linea digital mixer** unit. The warranty will be invalidated if the product is not installed according to these instructions.

Installation must be carried out by qualified installers in accordance to this installation manual. AS/NZS3500 standards, rules and safety regulations do apply.

PLACE OF INSTALLATION

The **Linea digital mixer** unit must be installed in an accessible place and in accordance to this installation manual. This ensures a problem-free service and maintenance procedure.



DANGER OF ELECTRIC SHOCK! **ELECTRICAL INSTALLATION**

Before opening the housing, the mains connection must be switched off. Work on electrical parts and connections must be carried out by qualified electrician. Country-specific standards and regulations do apply.

1. Digital controller and Digital Display

The Digital controller and the digital display are powered by a low voltage supply, so can safely be installed in a showering area they must not be installed in situations where the ambient temperature is likely to fall below 5°C or rise above 40°C. The digital controller and the digital display are water proof.

2. Cables

Cables which are chased into the wall must be protected by a conduit or sheathing to allow removal for service or maintenance.

Surface mounted cables should be protected by a conduit, even in a loft, where there may be a risk of damage from vermin.

Please check for hidden pipes or cables before drilling any holes.

3. Pipe work

Long pipe runs, on both inlet and outlet, will reduce the flow rate at the shower head, 22mm pipe should be used for supply and reduce down to 15mm as close to the processor as possible to reduce pressure losses and help maintain flow rate. To optimize performance minimise the number of elbows used.

Install isolating valves on the supply pipes to enable easy maintenance.

All copper pipework must be cross-bonded and connected to an earth point.

Please note:

Before connecting pipework to the valves, flush for at least 5 minutes to ensure that any debris is washed out.

PRECAUTIONS

1. This appliance is not intended for use by persons (including children) with reduced physical, sensory or mental capabilities, or lack of experience and knowledge, unless they have been given supervision or instruction concerning use of the appliance by a person responsible for their safety.
2. Children should be supervised to ensure that they do not play with the appliance.
3. If the supply cord is damaged, it must be replaced by the manufacturer, its service agent or similarly qualified persons in order to avoid a hazard.
4. An electronic copy of the installation and user guides are available on the Felton website – please visit www.felton.co.nz

MAINTENANCE

Felton products are made of high quality materials and require only minimal maintenance. The following maintenance tips help to preserve the surface and prevent damage through incorrect cleaning. Fittings and control parts should be wiped dry after used. Only use mild cleaning products that contain soap. The following must not be used: Scourers, abrasive sponges, hydrochloric acid, lime, plaster or cement removers, solutions or cleaning agents containing acid (pH ≤ 4), lime scale remover or vinegar-based cleaner – and cleaning agents where the chemical solution is not known which may be sold as special cleaner for fittings.

System Specifications

Electrical Parameters

Input Supply Voltage	50Hz-60Hz
Supply Voltage of Control	
Processor & Diverter	DC12V
Maximum Load	18W

Water Pressures

Inlet Cold Water Static Pressure	150-500kPa
Inlet Cold Water Dynamic Pressure	150-500kPa
Inlet Hot Water Static Pressure	150-500kPa
Inlet Hot Water Dynamic Pressure	150-500kPa
Outlet Water Flow Rate at 300kPa	25L/min

Water Path

Input	1/2" BSP
Outlet	1/2" BSP

Temperatures

Temperature (Factory Preset)	38°C
Maximum Temperature (Setting Range)	25°C - 45°C
Minimum Temperature	25°C, full cold water selectable
High Temperature Protection	49°C
Temperature Stability	+/- 1°C at recommended supply condition
Inlet Hot Water Range	55°C - 65°C
Inlet Cold Water Range	5°C - 25°C
Ambient Temperature	5°C - 40°C
Humidity	95% non-condensing


Time

Power Off Water Protection Time	≤3s
Cold Water Supply Failure Protection	≤2.5s
IP Rating	IPX4


TOOLS REQUIRED




1. Pencil




2. Phillips screwdriver




3. ø40mm hole saw



4. Utility knife




5. Drill




6. Spirit level

DIGITAL MIXER


1 x Digital controller

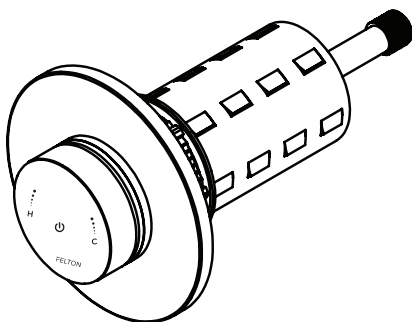


1 x Digital display

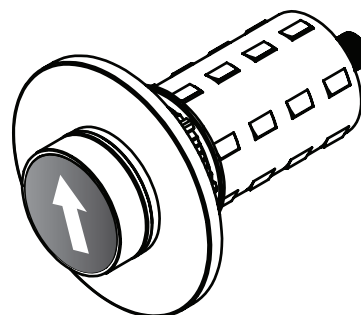

DIGITAL MIXER

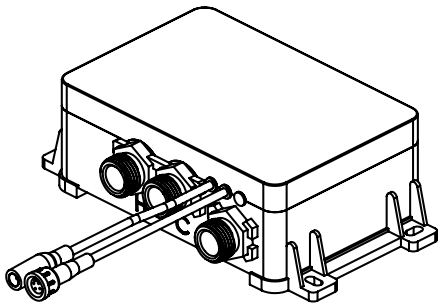

1 x Digital mixing unit




1 x DC12V power adapter




2 x 2m data cable


*(7.5mm option is available.
If a longer extension cable
is required, please contact
Felton customer service.)*



1 x communication cable




2 x preline wall plugs



4 x Set of screws
4 x Wall screw plugs

MEASUREMENTS

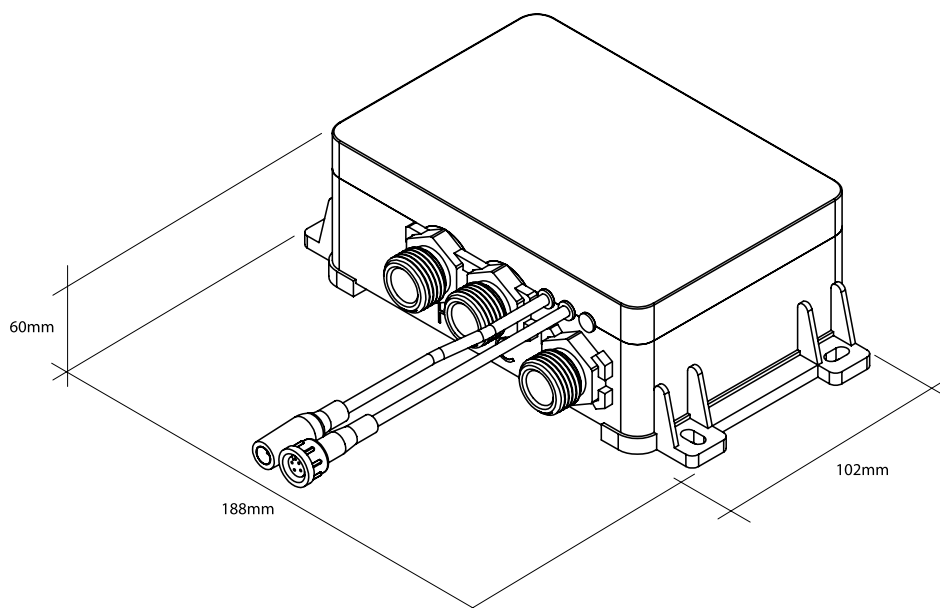

SCOPE OF APPLICATION



Wire and Data Cable must be installed prior to the wall lining.

It is recommended that the data cable is installed in conduit for ease of maintenance.


Important: The Digital Mixer must have an access panel and should not be sealed in the wall

Warning: Please ensure that all electrical installations are installed by a registered electrician and complies with the Electrical (Safety) Regulations of NZ.


Important: The Digital Mixer must have an access panel.

LINEA DIGITAL SHOWER MIXER

A Ceiling Mounted (Recommended)

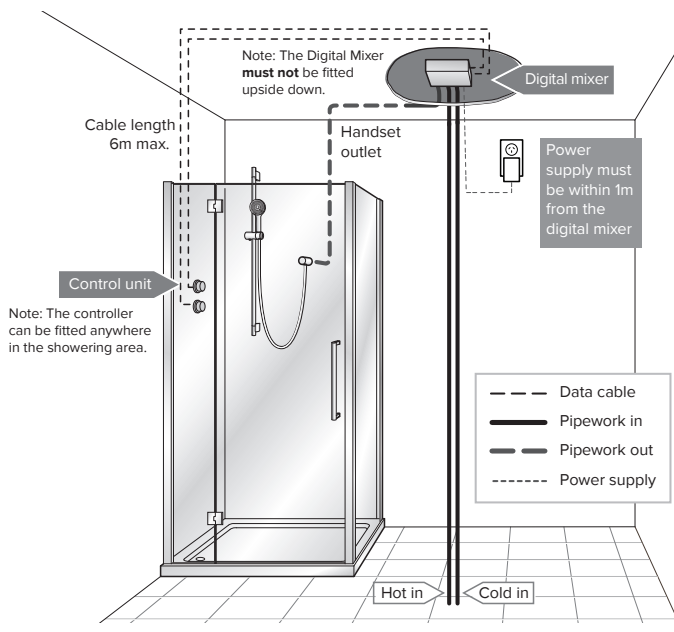


B Wall Mounted

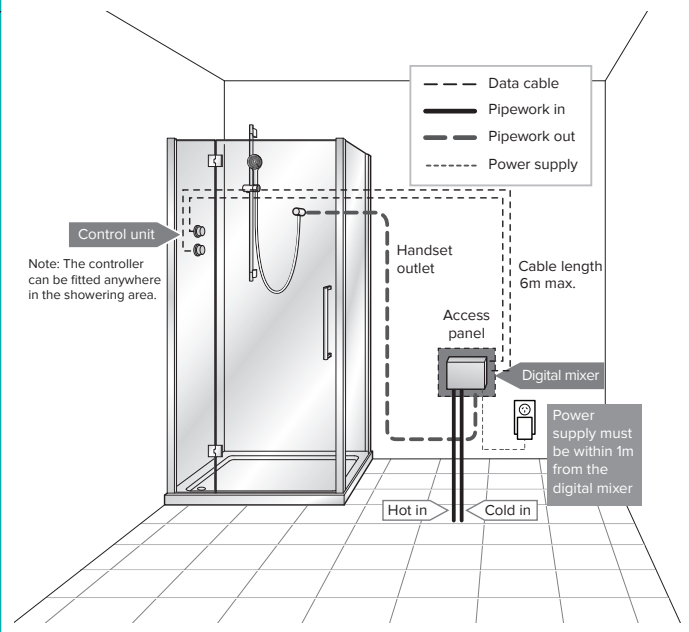


LINEA DIGITAL WALL MOUNT BASIN/BATH MIXER

Under Basin (Recommended)

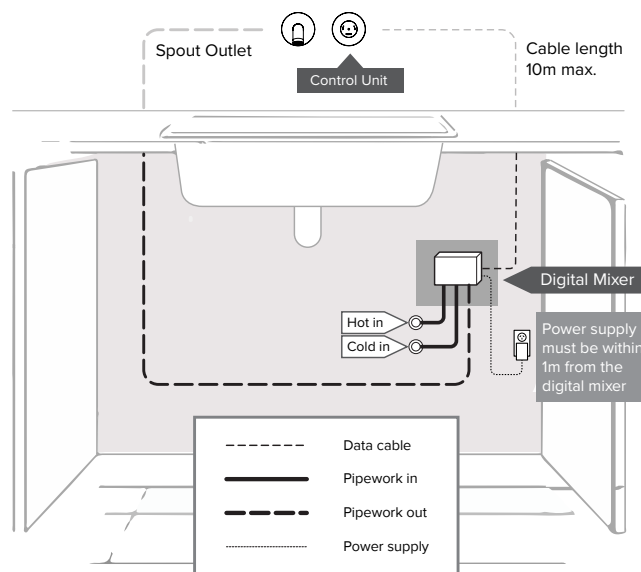


SYSTEM CONNECTION DIAGRAM

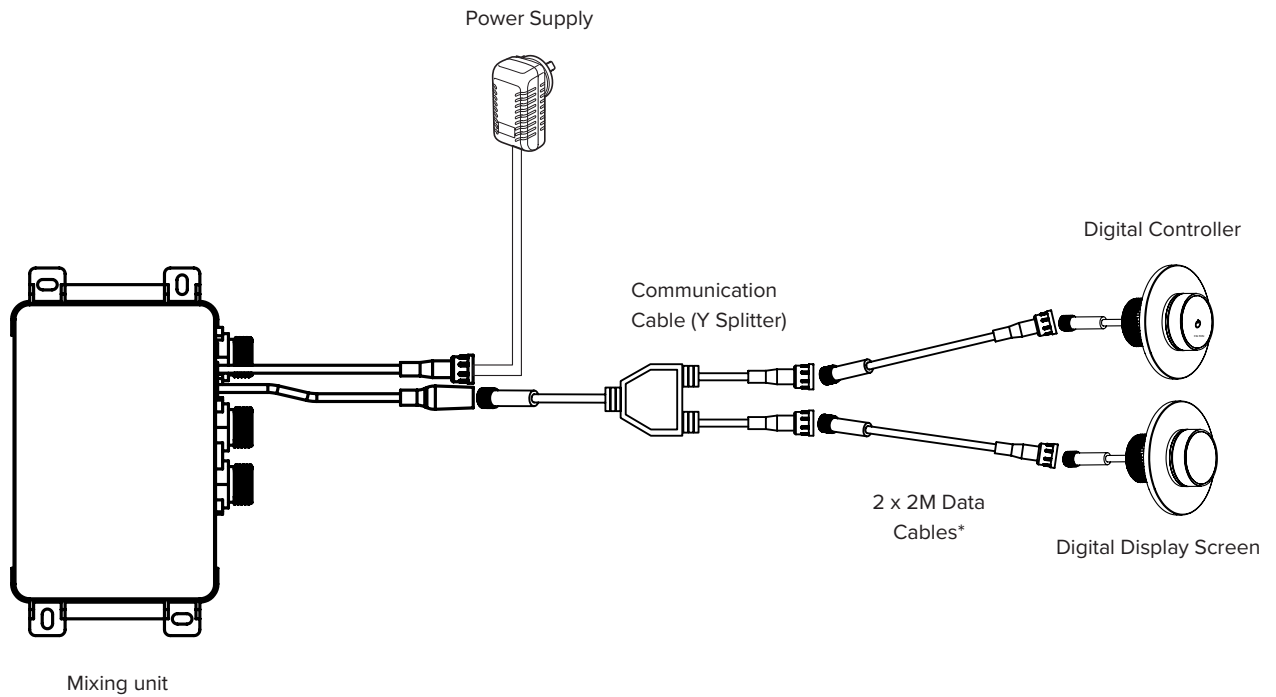

***Note: 7.5mm option is available. If a longer data cable is required, please contact Felton customer service.**


MIXING UNIT MOUNTING

- 1 Mark fixing holes and mount the mixing unit using the supplied screws (use the wall plugs if mounting on to jib). The digital mixing unit must be accessible and should not be sealed in the wall.

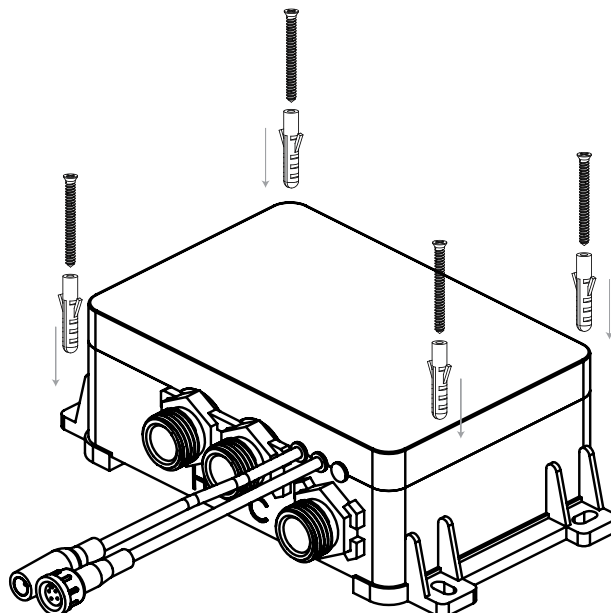


CONTROL UNIT INSTALLATION

- 2 Drill a 40mm hole on the wooden nog or backer board where the controller or display will be mounted.

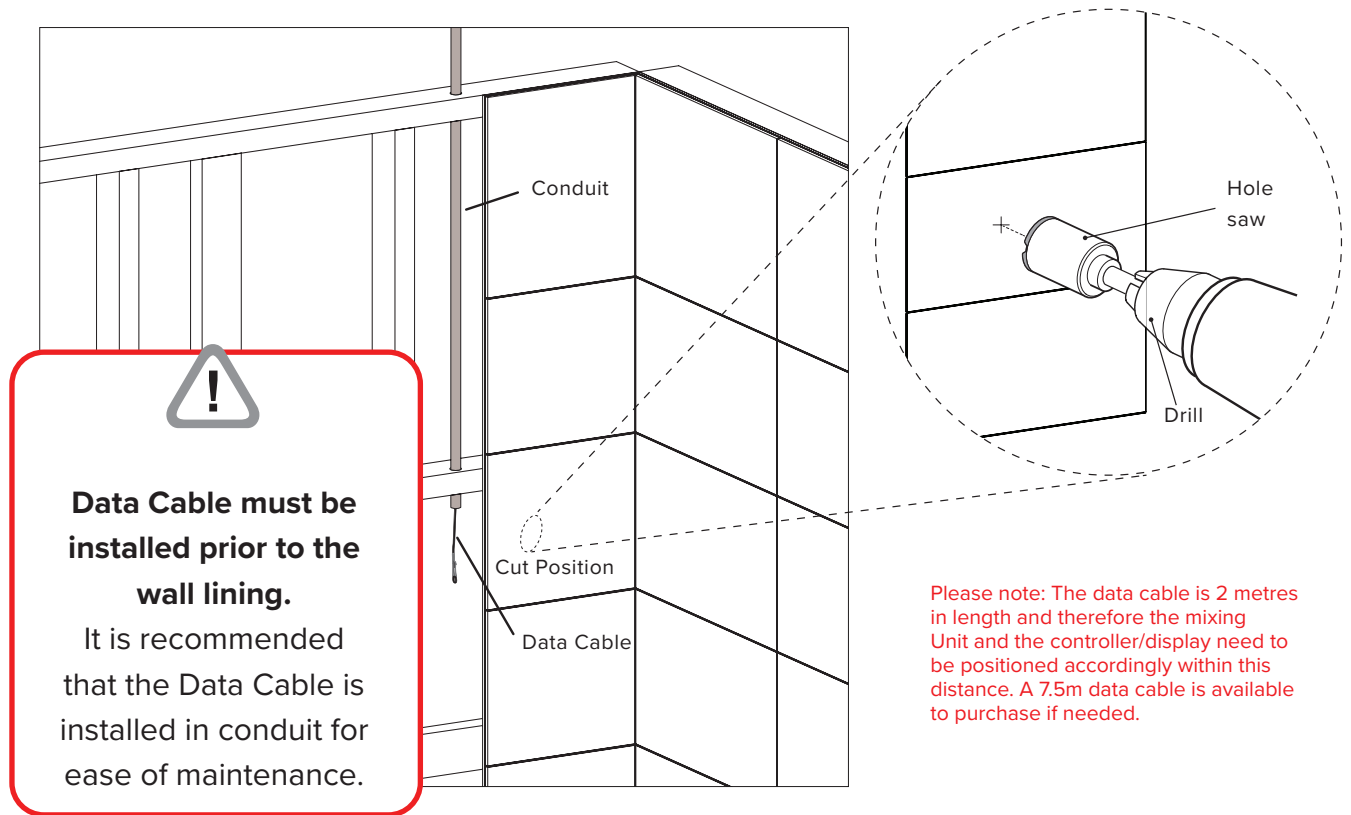


- 3 Press the pre-line wall plug into the 40mm hole on the nog and feed the cable through the plug. Attach the cable onto the convenient clip at the front of the plug.


NOTE: this plug will need to be removed after the wall is finished so do not seal it in the nog.

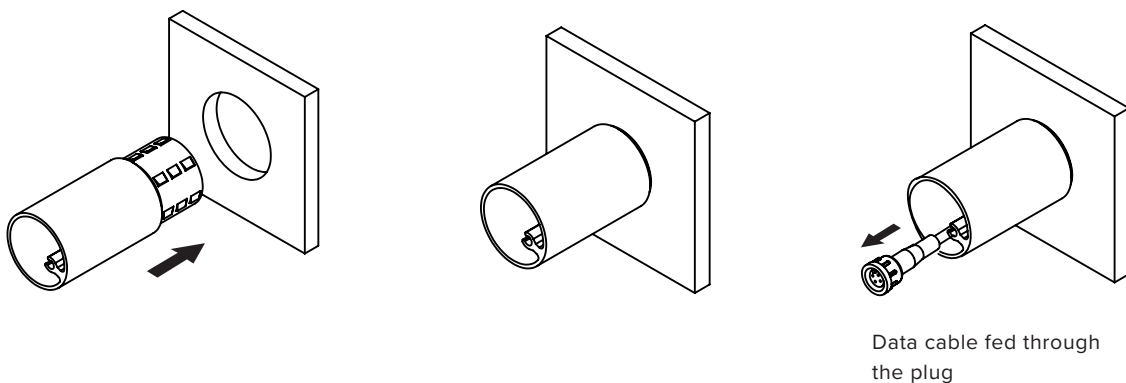

- 4** When installing gib and finished lining, drill a hole that accommodates the diameter of the wall plug. (min 45mm dia, max 65mm dia). should end up looking like this:

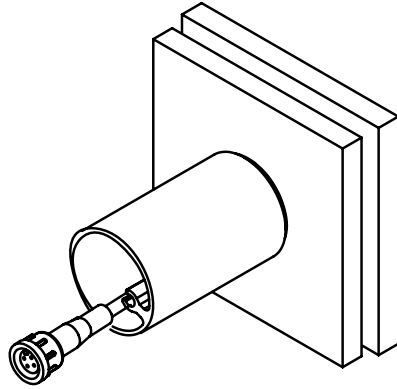


-
- 5** Pull the pre-line wall plug free of the wall (take care not to damage the data cable). Remove the data cable that was clipped on to the pre-line wall plug and hold on to it.

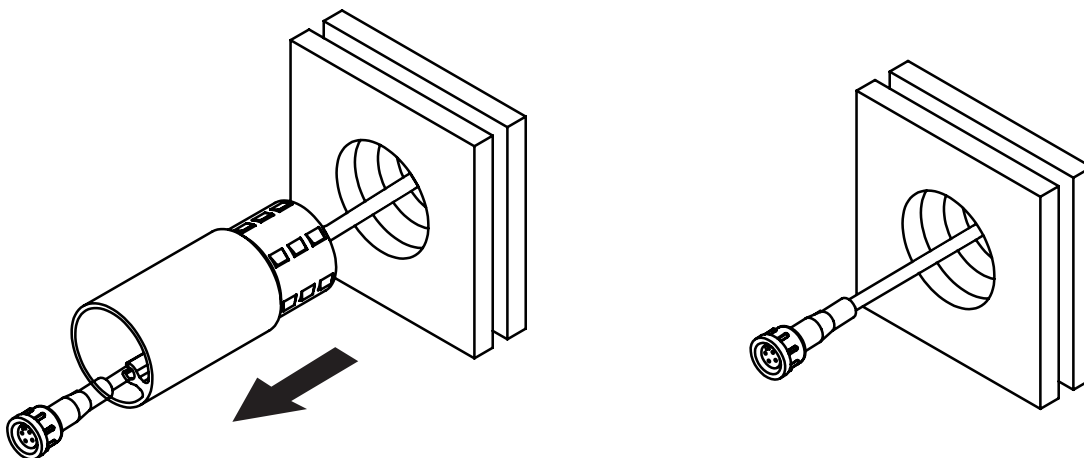

CONNECTING THE CONTROL SYSTEM TO THE MIXERS

- 6** Connect the data cable to the digital controller/display and push in the attached mounting plug. Apply a silicone bead to the back of faceplate.

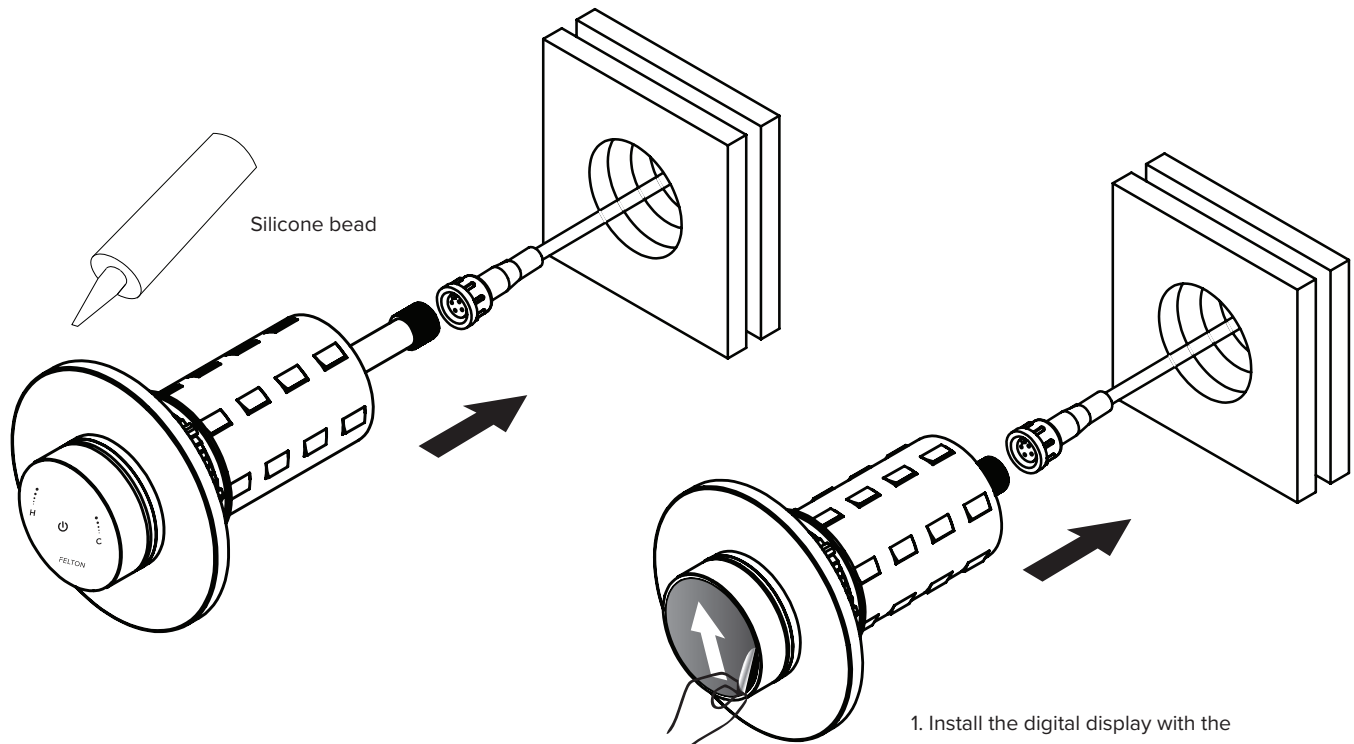

1. Install the digital display with the arrow facing upward.

2. Remove the protective film & the arrow.

Note: If the Mounting plug is too long (hits the back of the nog), it can be removed and cut down to size. Min mounting distance (distance from the front of the finished wall to the front of the nog) is 25mm. The max mounting distance is 70mm.


OPERATING THE CONTROL UNIT

1 TURNING THE MIXER ON/OFF

Press the mixer once to turn on. The mixer will light up. Press the mixer again to turn off.

2 ADJUSTING THE TEMPERATURE

Turn the mixer clockwise for hot water and anti-clockwise for cold water.

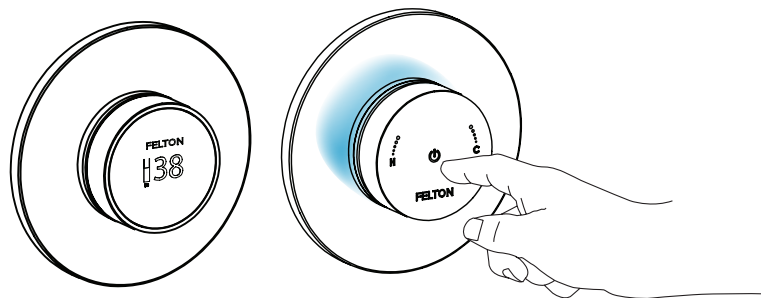

TROUBLESHOOTING

ERROR MESSAGE ON SCREEN OR FUNCTIONAL ISSUE	RED LIGHT FLASH	POSSIBLE CAUSES
COLD INLET FAILURE	Flash twice	No cold water
		Hot water presser too high
		Processor failure
TEMPERATURE CONTROL FAILURE	Flash three times	Outlet water temperature sensor failure
INLET TEMPERATURE SENSOR FAILURE	Flash four times	Hot water temperature sensor failure
OUTLET SWITCH FAILURE	Flash five times	Motor failure
CONNECTION ERROR	Flash six times	Cable is not connected
		Pins are damaged
INLET HOT WATER TEMPERATURE OVER 85 °C	Flash seven times	Inlet hot water temperature is over 85°C
INLET HOT WATER TEMPERATURE IS TOO LOW	Flash eight times	Balance pressure to eliminate difference
		No hot water
		Inlet hot water temperature is too low
		Check valve in hot water inlet failure & cold water pressure is too high
		Inlet hot water pipe is too long so that mixed water cannot reach pre-set temperature within 2 minutes
INLET COLD WATER TEMPERATURE IS TOO HIGH	Flash nine times	Inlet cold water temperature is too high
		Check valve in cold water inlet failure & hot water pressure is too high
PROCESSOR SOUNDS AS THOUGH IT IS REPEATEDLY CLICKING	-	Water supplies can't reach the pre-set temperature, and system keeps on adjusting temperature
WATER COMES OUT OF MORE THAN ONE OUTLET	-	Electronic valve inside diverter is blocked
OUTLET TEMPERATURE FLUCTUATES	-	Temperature of hot water supply is too low
		Inlet hot and cold water pressure is not stable
		Inlet hot and cold water pressure difference is not stable
		Water flow is too low
WATER OUTLET IS LETTING BY	-	Cartridge is blocked by debris
		Cartridge failed
THE PROCESSOR IS LEAKING	-	Inlet pressure is too high
		Over rotated the brass inside seal
		Seal damaged during installation

	SOLUTIONS	SYSTEM RESPONSE
	Check cold water supply	Will stop the water flow
	Adjust inlet hot water pressure ($\leq 1\text{mpa}$)	Will stop the water flow
	Replace processor	Will stop the water flow
	Replace processor	Will stop the water flow
	Replace processor	Will stop the water flow
	Replace processor	Will stop the water flow
	Check cable connection	Will stop the water flow
	Check communication cable	Will stop the water flow
	Adjust inlet hot water temperature ($\leq 85^{\circ}\text{c}$)	This is only a warning, does not stop water flow
	Check hot water supply	
	Adjust inlet hot water temperature ($\geq 55^{\circ}\text{c}$)	
	Check the valve to ensure it's clean and there is no external objects inside	
	Replace processor	
	Restart the unit (for multiple times if needed)	
	Adjust inlet cold water temperature ($\leq 25^{\circ}\text{c}$)	
	Adjust temperature on panel until it display "cold "	
	Check the valve to ensure it's clean and there are no external objects inside.	
	Replace processor	
	Ensure the temperature and pressure of hot water and cold water is within the specified range.	No programmed response
	Replace the diverter.	
	Open the diverter and clean inside to remove debris.	
	Check and ensure the temperature of hot water is between 55-75°C.	
	Check and ensure the water pressure supply is stable.	
	Ensure the pressure difference between hot and cold supply are maintained.	
	Ensure the water pressure is under the specified range.	
	Switch the valve on, then off, after 10 seconds.	
	Replace processor.	
	Ensure the water pressure is under the specified range.	
	Do not over-rotate.	
	Replace the processor.	

If issue persists or is not covered in the above, please contact our Felton Technical Team on NZ 0800 743 358 | AUS 1800 792 760 or sales@felton.co.nz

WARRANTY

5 Year Replacement Warranty with 2 Years Plumber's Labour

Subject to the terms and conditions set out below (including the terms of the Felton Finish Warranty), Felton Industries Limited (Felton) guarantees that the electronic components of Felton Digital branded products stated to have a "5 year warranty" (products) will be free from defects in materials and workmanship for a period of 5 years from the date of purchase. Fair wear and tear is expressly excluded.

This warranty is effective for 5 years from the date of purchase and covers the electronic parts of the product only (excluding batteries) and includes a labour warranty that applies for 2 years from the date of purchase for the reasonable cost of plumber's labour relating solely to repairing or replacing the product hardware. You must retain proof of purchase of the product (such as an invoice or receipt) and proof of the original installation by a registered plumber and provide these to Felton on request. You must also provide Felton with evidence of the reasonable cost of the plumber's labour to repair or replace the products.

This warranty is for manufacturing defects to the electronic components only and does not cover any damage to product due to abuse, negligence or improper installation. This warranty is given on the understanding and is strictly subject to the product being originally installed by a registered plumber and operated according to Felton's installation guide and the Australian/New Zealand standard AS/NZS3500. For the avoidance of doubt, this warranty does not apply to the finish of the product which is covered by the Felton Finish Warranty below only.

This warranty is provided to persons who are a "consumer" under the Consumer Guarantees Act 1993 only and applies where the product has been used in domestic/residential dwellings only (and not for commercial use). This warranty is not transferrable (including to any subsequent owner of the dwelling) and applies to the purchaser of the product only.

This warranty does not cover and expressly excludes:

- 1) any consumable items (e.g. batteries, filters, installation fittings) supplied with the products.
- 2) damage, problems or unsatisfactory performance caused to the electronic hardware by:
 - a. faulty or incorrect electrical wiring, incorrect power supply, voltage fluctuations, over voltage transient spikes or electromagnetic interference not originating within the electronic hardware.
 - b. incorrect or poor installation or application
 - c. operation at conditions outside the operating conditions specified in the Felton Digital technical or sales data applicable to that electronic hardware.
 - d. reconfiguration of the digital interface by the user.

Felton Finish Warranty

Felton warrants the product finish to be free from defects in materials and workmanship under normal installation, use, and service in a residential/domestic dwelling for:

- 5 years from the date of purchase for chrome and PVD finishes.
- 2 years from date of purchase for black finishes.

The Felton Finish Warranty is subject to and does not cover damage caused by the use of an unsuitable cleaner. For the avoidance of doubt, at no stage should any surface coatings be cleaned with cleaning agents that contain a corrosive acid or a scouring additive. Surface coatings should be cleaned with soft microfibre cloth with a solution of warm water and mild detergent. Any damage caused by an unsuitable cleaner will not be covered by this warranty. See Felton's website for full care instruction.

This warranty is effective from the date of purchase and covers the product finish only. Fair wear and tear is expressly excluded. You must retain proof of purchase of the product (such as an invoice or receipt) and provide this to Felton on request.

IMPORTANT: This warranty is subject to any other rights or remedies that you may have as a "consumer" under the Consumer Guarantees Act 1993 (or any other applicable legislation) and to Felton's Terms of Trade. Nothing in this warranty limits those rights to the extent you are a "consumer" under the Consumer Guarantees Act 1993.

This warranty applies strictly to products purchased from Felton after 1 June 2026.

NOTES

BUILDING PRODUCT INFORMATION REQUIREMENTS (BPIR) **RELEVANT BUILDING CODE CLAUSES & CONTRIBUTIONS TO COMPLIANCE**

This product is Watermarked under license **WM26430 - Digital thermostatic mixers AS 4032.4: 2014**

B2 - Durability

B2.3.1 (c) applies (performance of building elements)

Proof of durability – Service history: Felton products have been installed and used in NZ for the last 50 years and warranty calls are at a minimum and within the quality principles of Felton.

Products that are WaterMark certified are subject to endurance testing.

F2 - Hazardous building materials

F 2.3.1 applies (performance)

Products in contact with drinking water is tested to AS/NZS 4020 (ensures acceptance levels of contaminants for human consumption). Compliance with Lead Free and DR Lead Free requirements where applicable.

G12 - Water Supplies

G12.2 applies (materials)

Felton products in contact with drinking water are tested to AS/NZS 4020, ensuring no water contamination and compliance with Lead Free and DR Lead Free requirements where applicable.

G12.3.2 applies (contamination of water)

All Felton products are designed, manufactured and inspected/tested, that are WaterMark certified, are subject to contamination of water testing (AS/NZS 4020). Compliance with Lead Free requirements where applicable.

G12.3.5 applies (performance)

Felton sanitary fixtures intended for utensil washing and personal washing, showering, or bathing are designed to be connected to a hot water supply and tested to AS/NZS 4020, ensuring suitability for potable water, non-contamination, and compliance with the performance requirements of NZ Building Code G12.

G12.3.7 (c) applies (flow rates)

All Felton products are designed, manufactured and inspected/tested, that are WaterMark certified, are subject to flow rates testing that is within the limitation set by the AS/NZS 3500 (NZBC) and the WELS regulations.

G12.3.10 applies (performance)

Felton water supply taps are designed to be accessible and operable, including for people with disabilities, when installed in accordance with Felton's instructions, supporting compliance with the accessibility requirements of the NZ Building Code.

For technical assistance please ring
NZ 0800 743 358 or (09) 528 0810 | AUS 1800 798 760

FELTON